


THE LOAD / PULL INDUCED TO THE OPERATOR COULD BE AS HIGH AS 1000 LBS WHILE THE DOOR IS BEING OPERATED. MAKE SURE THAT THIS MOUNTING PAD HAS THE STRENGTH TO SUPPORT THESE LOADS.

- NOTES:
- PLEASE VERIFY VOLTAGE, PHASE & MOUNTING.
 - ALL OPTIONS ARE AT ADDED COST.
 - A CLEARANCE OF 6" SHOULD BE ALLOWED FOR ACCESS TO ELECTRIC BOX.
 - CONTROL VOLTAGE IS A NEC CLASS 2 CIRCUIT.
 - AVERAGE DOOR TRAVEL SPEED IS 8" PER SECOND.

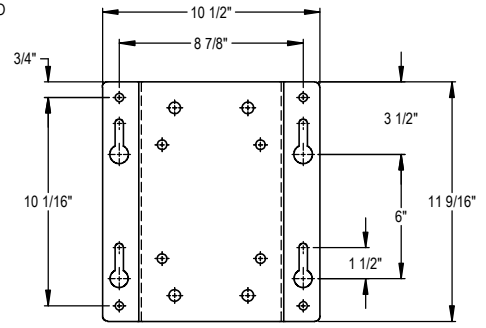

WALL MOUNT BRACKET

TEFC MOTOR	"A" DIM
1/2HP (1PH)	10 1/4"
1HP (1PH)	11 7/16"
1/2HP (3PH)	9 3/4"
1HP (3PH)	10 3/4"
1HP (575V)	10 3/4"

TENV MOTOR	"A" DIM
1/2HP (1PH)	10 1/8"
1/2HP (3PH)	8 13/16"
1HP (3PH)	11 5/16"
1HP (575V)	11 5/16"

OPEN DRIP-PROOF MOTOR	"A" DIM
1/2HP (1PH)	8 1/8"
3/4HP (1PH)	10 3/4"
1HP (1PH)	10 3/4"
1/2HP (3PH)	8 3/4"
3/4HP (3PH)	9 1/4"
1HP (3PH)	9 3/4"
1/2HP (575V)	8 3/4"
3/4HP (575V)	9 1/4"
1HP (575V)	9 3/4"

ELECTRIC OPERATOR: GCL-GH (HEAVY DUTY) (1/2, 3/4, 1HP)
DOOR TYPE: ROLLING STEEL
MOUNTING TYPE: WALL MOUNT
PROJECT:
ARCHITECT:
CONTRACTOR:
DISTRIBUTOR:
PLANT:

ARCHITECT DOOR NUMBER	QTY	FACTORY ORDER NUMBER	MOUNT TYPE		VOLTS					PHASE		CONTROL STATION			
			WALL MOUNT	ROLLING STEEL	115	208	230	460	575	1 PHASE	3 PHASE	3 BTN	KEY SWITCH	EXT. FLUSH 3 BUTTON	